




an ISO 9001:2008 Registered Company

# 1968-72 Chevrolet Chevelle

Condenser Kit *without* Drier  
(026670)

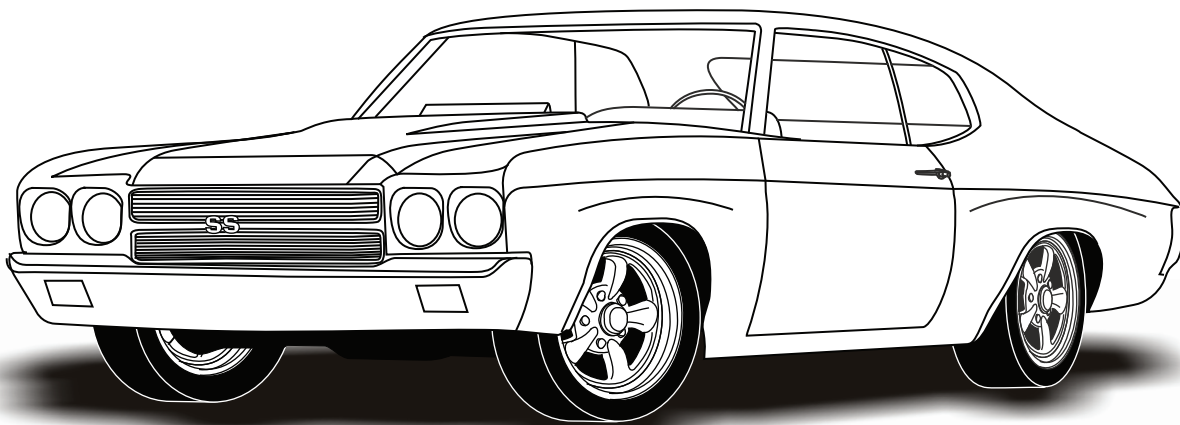

18865 Goll St. San Antonio, TX 78266  
Phone: 210-654-7171  
Fax: 210-654-3113  
[www.vintageair.com](http://www.vintageair.com)





[www.vintageair.com](http://www.vintageair.com)

# Table of Contents

**Thank you for purchasing this condenser kit from Vintage Air. When installing these components as part of a complete SureFit™ system, Vintage Air recommends working from front to back on the vehicle, installing the condenser kit, hose kit, and compressor first, followed by the wiring, evaporator, and finally the control panel.**

Cover.....	1
Table of Contents.....	2
Packing List/Parts Disclaimer.....	3
Information Page.....	4
Core Support Measurements.....	5
Mounting Bracket Installation.....	6
Condenser Installation.....	7
Condenser Installation (Cont.).....	8
Packing List.....	9






www.vintageair.com

## Packing List: Condenser Kit (026670)

No.	Qty.	Part No.	Description
1.	1	03767-VUC	Condenser, 14" x 24", Parallel Flow
2.	4	18249-VUB	Screw, 10-24 x 3/8", Pan Head
3.	4	18260-VUB	Nut, 10-24, with Star Washer
4.	1	18266-VUB	Screw, #14 x 3/4", Sheet Metal
5.	1	18611-VUB	Washer, 5/16", Flat
6.	1	644074	Bracket, Top Mounting
7.	1	644071-FCB	Bracket, Bottom Mounting

**\*\* Before beginning installation, open all packages and check contents of shipment.  
Please report any shortages directly to Vintage Air within 15 days. After 15 days,  
Vintage Air will not be responsible for missing or damaged items.**

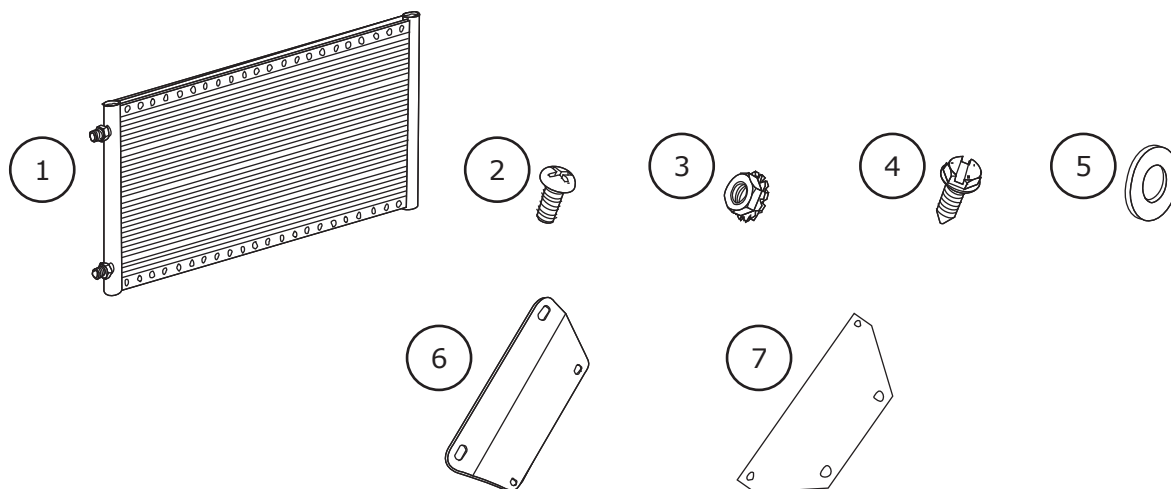

**NOTE: Images may not depict actual parts and quantities.  
Refer to packing list for actual parts and quantities.**





www.vintageair.com

## Important Notice—Please Read

*For Maximum System Performance, Vintage Air Recommends the Following:*

**NOTE:** Vintage Air systems are designed to operate with R134a refrigerant only. Use of any other refrigerant could damage your A/C system and/or vehicle, and possibly cause a fire, in addition to potentially voiding the warranties of the A/C system and its components.

### Refrigerant Capacities:

**Vintage Air System:** 1.8 lbs. (1 lb., 12 oz.) of **R134a**, charged by weight with a quality charging station or scale. **NOTE:** Use of the proper type and amount of refrigerant is critical to system operation and performance.

**Other Systems:** Consult manufacturer's guidelines.

### Lubricant Capacities:

**New Vintage Air-supplied Sanden Compressor:** No additional oil needed (Compressor is shipped with proper oil charge).

**All Other Compressors:** Consult manufacturer (Some compressors are shipped dry and will need oil added).

### Safety Switches

Your Vintage Air system is equipped with a binary pressure safety switch. A binary switch disengages the compressor clutch in cases of extreme low pressure conditions (Refrigerant Loss) or excessively high head pressure (406 PSI) to prevent compressor damage or hose rupture. A trinary switch combines Hi/Lo pressure protection with an electric fan operation signal at 254 PSI, and should be substituted for use with electric fans. Compressor safety switches are extremely important since an A/C system relies on refrigerant to circulate lubricant.

### Service Info:

**Protect Your Investment:** Prior to assembly, it is critical that the compressor, evaporator, A/C hoses and fittings, hardlines, condenser and receiver/drier remained capped. Removing caps prior to assembly will allow moisture, insects and debris into the components, possibly leading to reduced performance and/or premature failure of your A/C system. This is especially important with the receiver/drier.

Additionally, when caps are removed for assembly, **BE CAREFUL!** Some components are shipped under pressure with dry nitrogen.

**Evacuate the System for 35-45 Minutes:** Ensure that system components (Drier, compressor, evaporator and condenser) are at a temperature of at least 85° F. On a cool day, the components can be heated with a heat gun **or** by running the engine with the heater on before evacuating. Leak check and charge to specifications.

### Bolts Passing Through Cowl and/or Firewall:

To ensure a watertight seal between the passenger compartment and the vehicle exterior, for all bolts passing through the cowl and/or firewall, Vintage Air recommends coating the threads with silicone prior to installation.

### Heater Hose (Not Included With This Kit):

Heater hose may be purchased from Vintage Air (Part# 31800-VUD) or your local parts retailer. Routing and required length will vary based on installer preference.






[www.vintageair.com](http://www.vintageair.com)

## Core Support Measurements

This kit was developed based on the measurements below, which were taken from a 1970 Chevrolet Chevelle with Factory Air core support.

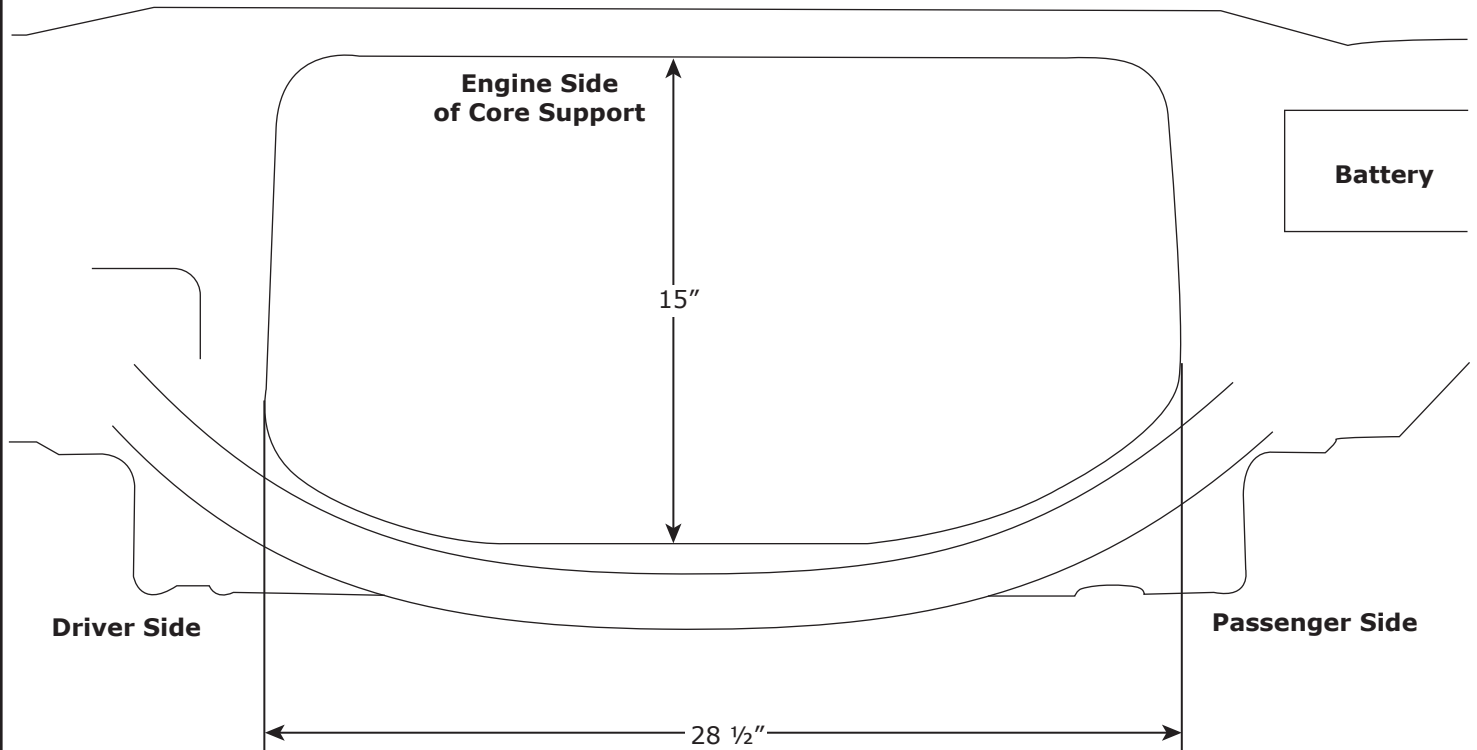






www.vintageair.com

## Mounting Bracket Installation

1. Install the top mounting bracket onto the condenser using (2) 10-24 x 3/8" pan head screws and (2) 10-24 nuts with star washers (See Figure 1, below). **NOTE: The bracket mounts to the outside of the flange through the 7th & 11th holes from the left side of the condenser.**
2. Install the bottom mounting bracket onto the condenser using (2) 10-24 x 3/8" pan head screws and (2) 10-24 nuts with star washers (See Figure 1a, below). **NOTE: The bracket mounts to the outside of the flange through the 5th & 13th holes from the right side of the condenser (Rear View).**

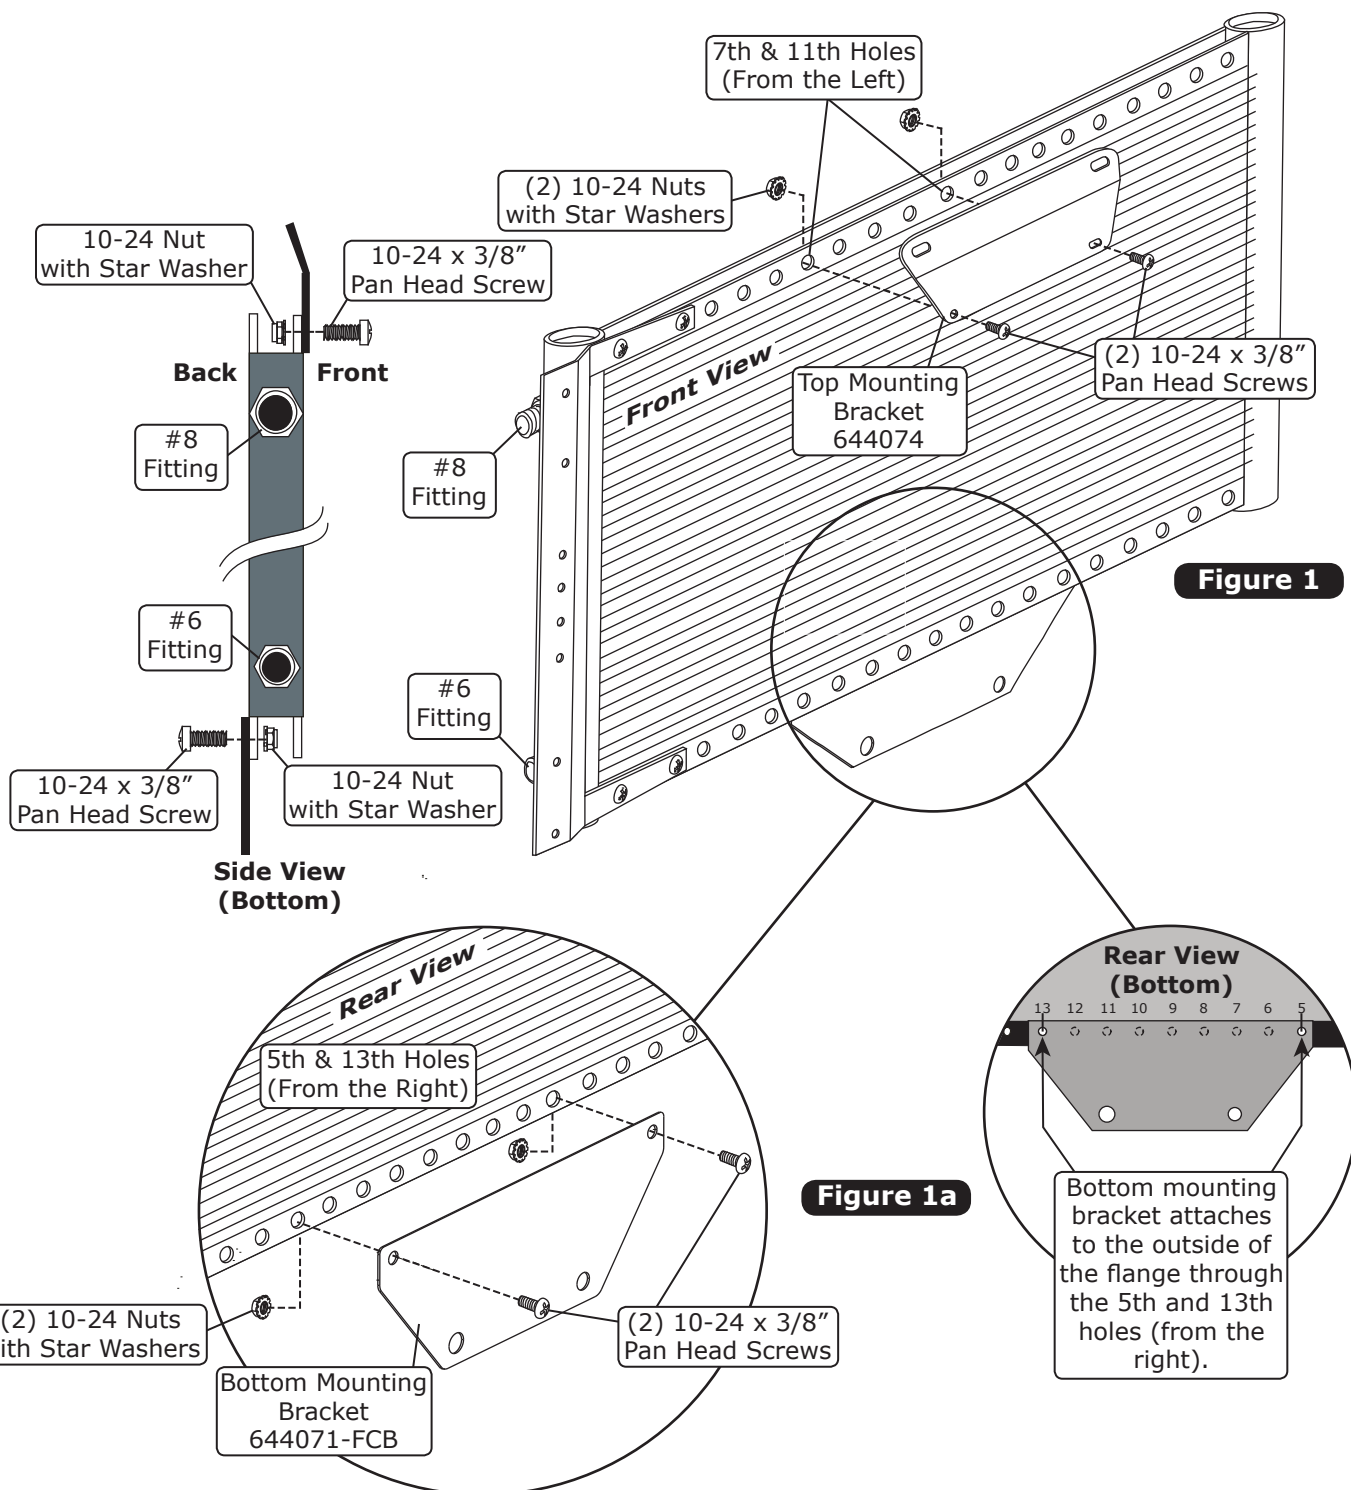






www.vintageair.com

## Radiator and Hood Latch Assembly Removal


1. Drain radiator.
2. Remove upper and lower radiator hoses.
3. Remove radiator.
4. Remove the OEM hood latch assembly (See Figure 2, below).

**Figure 2**

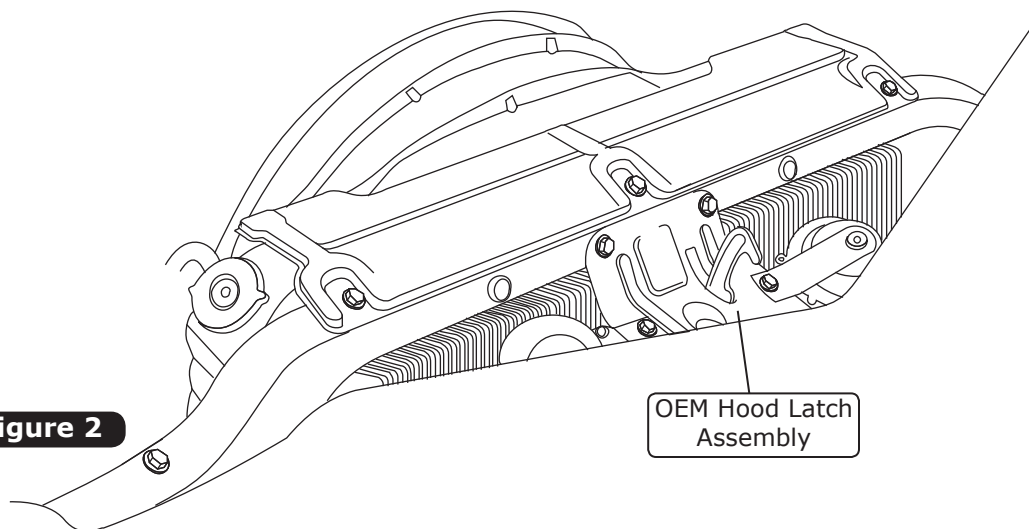

## Condenser Installation

1. Lower the condenser assembly into the vehicle from the engine side of the core support (See Figure 3, below).  
**NOTE: The top mounting bracket mounts on the front side of the core support (See Figure 4, Page 8).**

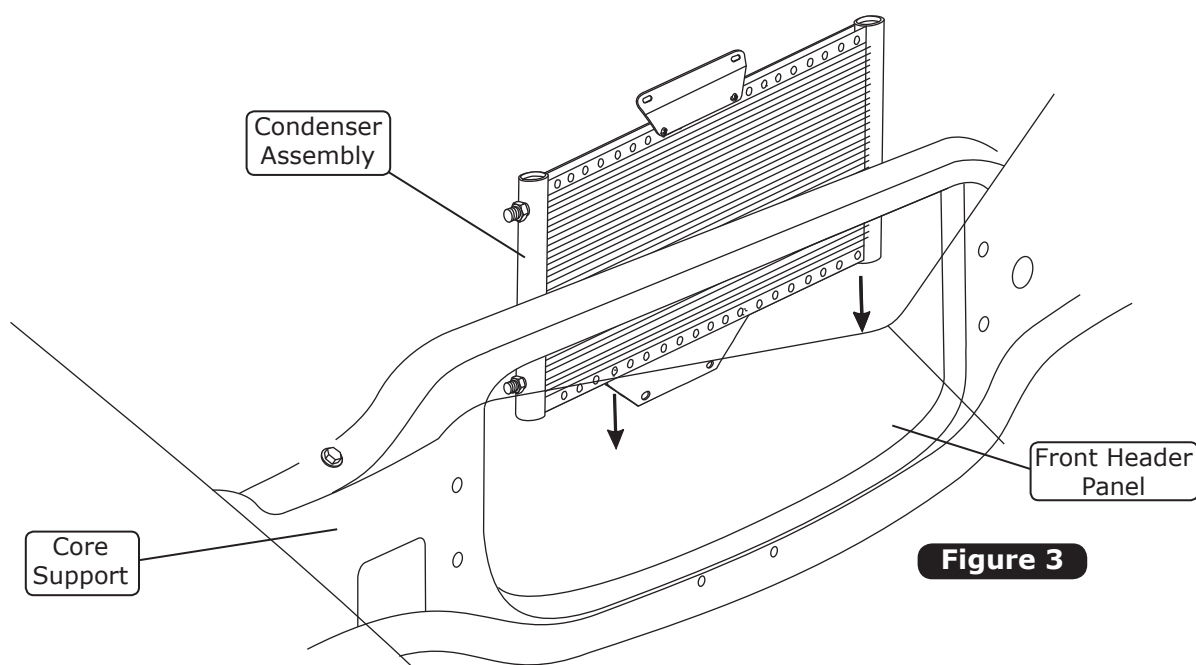

**Figure 3**







www.vintageair.com

## Condenser Installation (Cont.)

1. Secure the bottom passenger side of the condenser to the core support using the OEM bolt.
2. Using the driver side mounting hole as a guide, drill a 3/16" hole in the core support.
3. Secure the bottom driver side of the condenser to the core support using a #14 x 3/4" sheet metal screw and a 5/16" flat washer (See Figure 4, below).
4. Reinstall the hood latch assembly using the OEM bolts. Install the OEM bolts through the hood latch assembly, top mounting bracket and core support (See Figure 5, below).

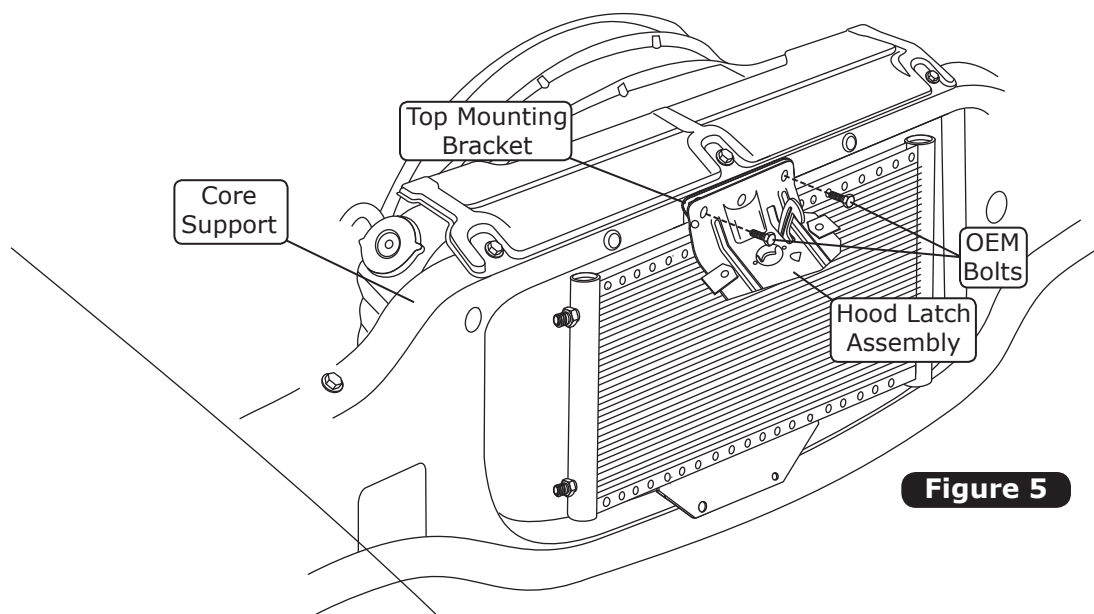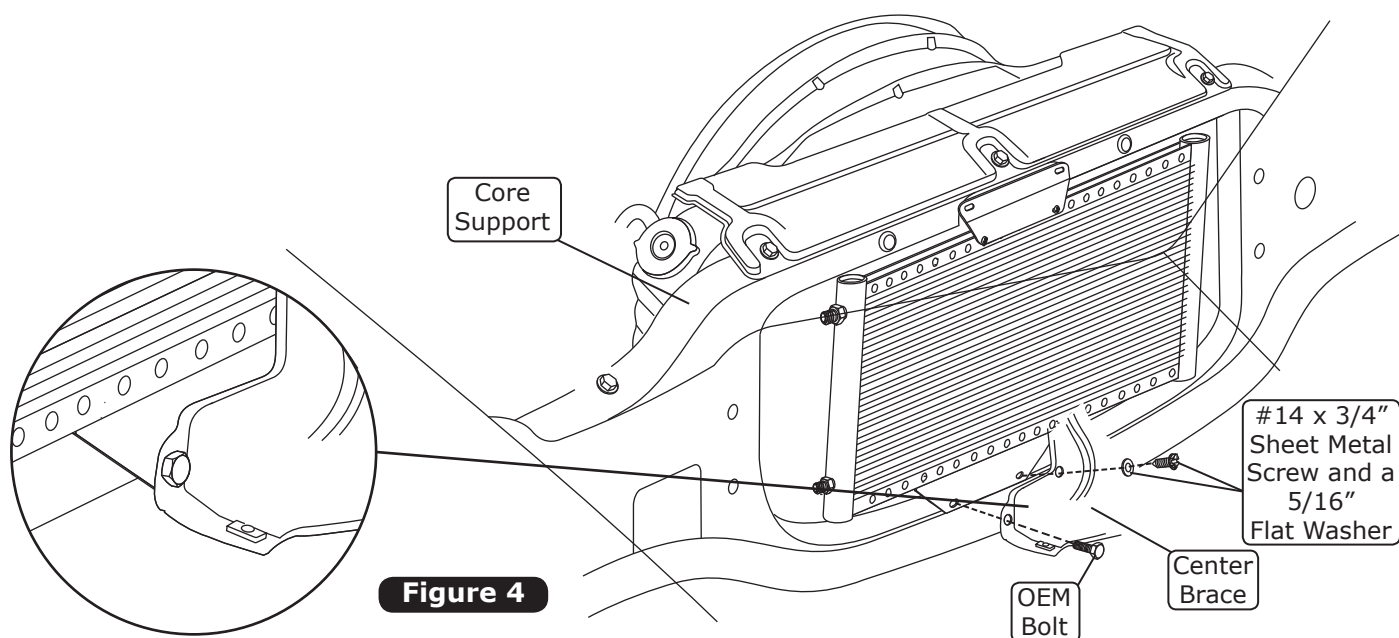










www.vintageair.com

## Packing List: Condenser Kit (026670)

No.	Qty.	Part No.	Description	
1.	1	03767-VUC	Condenser, 14" x 24", Parallel Flow	_____
2.	4	18249-VUB	Screw, 10-24 x 3/8", Pan Head	_____
3.	4	18260-VUB	Nut, 10-24, with Star Washer	_____
4.	1	18266-VUB	Screw, #14 x 3/4", Sheet Metal	_____
5.	1	18611-VUB	Washer, 5/16", Flat	_____
6.	1	644074	Bracket, Top Mounting	_____
7.	1	644071-FCB	Bracket, Bottom Mounting	_____

Checked By: \_\_\_\_\_  
Packed By: \_\_\_\_\_  
Date: \_\_\_\_\_

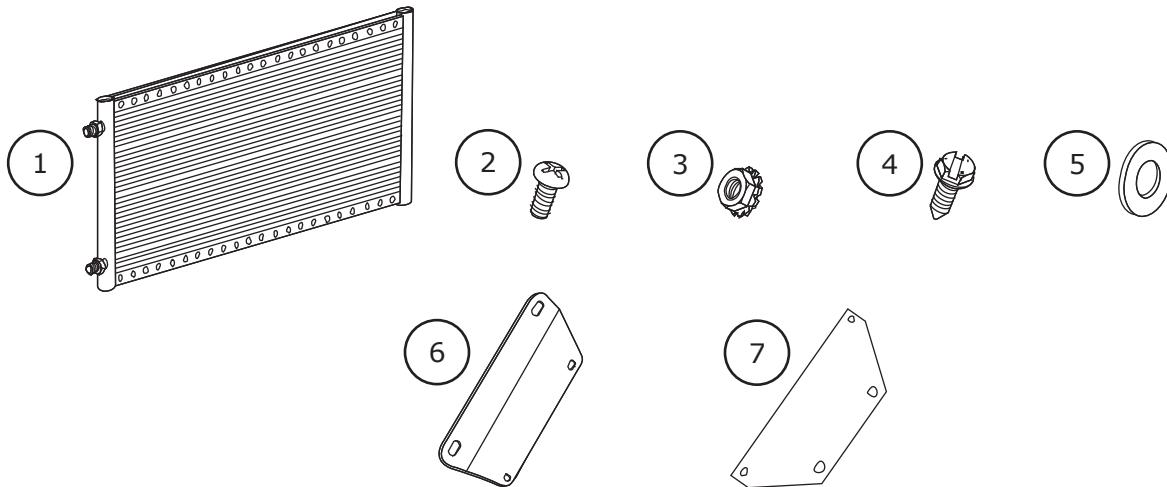

**NOTE: Images may not depict actual parts and quantities.  
Refer to packing list for actual parts and quantities.**